


one product range infinite uses

www.dallasdelta.com/voip

Guard MK3 VoIP



Sentry VoIP

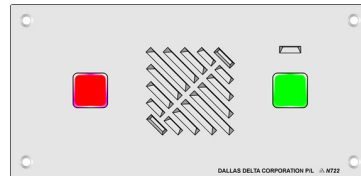

Liftcom / OEM VoIP



Physical Dimensions	254mm (W) x 104mm (H) x 50mm (D)	290mm (W) x 130mm (H) x 38mm (D)	84mm (W) x 168mm (H) x 38mm (D)
Form Factors	Horizontal or Vertical 1 or multi-button	Horizontal or Vertical 1, 2, 4 or multi-button	Liftcom or OEM
Connectors	1x RJ-45 connector for Category 5 / 6 Ethernet cable running at 10 Mbps; includes status indicator lights on socket. Phoenix style multi-way connector terminal block with 2mm screw on terminals.		
Supported Standards	Full support for open standards SIP. Support for full 802.3af power over Ethernet: Class 1. Support for g711 (uLaw and aLaw), g729, g726.32, g723.1, GSM		

